



Reliability Laboratory

TEST REPORT

Report No.: HC10092A/2009

Page: 1 of 7

Date: January 20, 2009

PREMISES DESIGN SYSTEM CO., LTD.
2F, NO. 7-1, LANE 55, TA CHIH ST.,
PANCHIAO CITY, TAIPEI COUNTY, TAIWAN, R. O. C.

The following merchandise was submitted and identified by the vendor as:

Product Description: Enterprise Digital Assistant, BT/WLAN/GSM/DCS
Style/ Item No.: M3 SKY/ No.1
Manufacturer/Vendor: M3 Mobile Co., Ltd.
Country of Origin: Korea
Quantity: Total 1 piece
Testing Period: Jan. 15, 2009 to Jan. 16, 2009

We have tested the submitted sample(s) as requested and the following results were obtained:

Test Required: (According to client's test specification, please see following sheets in detail.)

Test for Degrees of Protection Provided by Enclosures

IP Code	IP65
First characteristic numeral	Degrees of protection against access to hazardous parts and against solid foreign objects
Second characteristic numeral	Degrees of protection against ingress of water

Test Results: – PLEASE SEE ATTACHED SHEETS –

* HC10092/2009, dated January 17, 2009, is hereby canceled and replaced by HC10092A/2009.

Terence Hsieh
Asst. Manager

Test for Degrees of Protection Provided by Enclosures:

Test Equipment:

Name	Brand	Model	Serial No.
1.0 mm Test Wire Probe	ED&D	TRP-02	B0050180
Digital Force Gauge	ALGOL	HF-50	HF-101764
Dust Tester	T-MACHINE	TMJ-9723C	T-23-050411
IPX5 Water Jet Hose Nozzle Set	PTL	P03.26	5040288

Lab Environmental Conditions:

Ambient temperature: 25±3°C
 Relative humidity: 55±20%RH

Test Method/ Specification:

Test method: According to IEC 60529 Edition 2.1: 2001-02--IP65

1. Test for protection against access to hazardous parts:

Test method: IEC 60529 Edition 2.1: 2001-02--IP6X
The test wire with 1.0 mm in diameter and 100 mm long is pushed against or inserted through any openings of the enclosure with the force specified in Table 6 in IEC 60529 Edition 2.1: 2001-02. Examine whether the test wire touches the hazardous live parts inside the enclosure or not.

Test force: 1 N±10 %

2. Test for protection against solid foreign objects:

Test method: IEC 60529 Edition 2.1: 2001-02--IP6X (Dust test)

Type of dust: Talcum powder

The amount of dust: 2 kg

The chamber size: 1 m³

The maximum depression: -20 mbar

Test duration: 8 hours

- Examine protection against ingress of dust of specimen and perform functional check after this test.
- Functional check: Turn on the power of specimen then examine whether the display function of specimen could be work normally or not.

TEST REPORT

Test Method/ Specification--Continued:

3. Test for protection against water:

Test method: According to IEC 60529 Edition 2.1: 2001-02--IPX5

Sample condition: Non-operating

Test means: Spraying the enclosure from all practicable directions with a stream of water from a standard test nozzle as specified in test standard.

Internal diameter

of the nozzle: 6.3 mm

Delivery rate: 12.5 l/min ±5%

Distance from nozzle

to enclosure surface: between 2.5 m and 3 m

Core of the substantial

stream: circle of approximately 40 mm diameter at 2.5 m distance from nozzle

Test duration: 3 minutes

- Examine protection against ingress of dust of specimen and perform functional check after this test.
- Functional check: Turn on the power of specimen then examine whether the display function of specimen could be work normally or not.
- This test was subcontracted to Electronics Testing Center, Taiwan (Report No.: 09-01-VAA-040).

TEST REPORT

Report No.: HC10092A/2009

Page: 4 of 7

Specimen:

Style/ Item No.: M3 SKY / No.1

Quantity: 1 piece

Test Result:

A. Degrees of protection against access to hazardous parts and against solid foreign objects (IP6X)

A-1 Test for protection against access to hazardous parts (IP6X)

Test Result		
Check Item		Style/Item No.
		M3 SKY/ No.1
1	Does the test wire penetrate any openings of the enclosure?	No
2	(followed check item 1) If the test wire penetrates any openings of the enclosure, does the test wire touch any hazardous live parts or any hazardous mechanical parts?	N/A
3	(followed check item 2) Does adequate clearance be kept between the test wire and hazardous live parts or hazardous mechanical parts?	N/A
Note 1: N/A means "Not Applicable". Note 2: The check items in this test report for inspecting the degree of protection provided by enclosures are reference to the requirements specified in IEC 60529 Edition 2.1: 2001-02 and in accordance with the acceptance conditions specified by client.		

A-2 Test for protection against solid foreign objects (IP6X)

Test Result		
Check Item		Style/Item No.
		M3 SKY/ No.1
1	Does any dust deposit inside the enclosure at the end of the test?	N/A
	Functional check	Normal
Note 1: N/A means "Not Applicable". Note 2: The check items in this test report for inspecting the degree of protection provided by enclosures are reference to the requirements specified in IEC 60529 Edition 2.1: 2001-02 and in accordance with the acceptance conditions specified by client.		

TEST REPORT

Report No.: HC10092A/2009

Page: 5 of 7







Test Result--Continued:

B. Degree of protection against ingress of water (IPX5)


Test Result		Style/Item No.
Check Item		M3 SKY/ No.1
1	Provide protection against ingress water?	Yes
2	(followed check item 1) If any water has entered, does the water accumulate near the cable end or live parts?	N/A
3	Functional check	Normal

Note 1: N/A means "Not Applicable".
 Note 2: The check items in this test report for inspecting the degree of protection provided by enclosures are reference to the requirements specified in IEC 60529 Edition 2.1: 2001-02 and in accordance with the acceptance conditions specified by client.

Test Photos:

	
<p>1. Appearance of specimen (M3 SKY)</p>	<p>2. Functional Check</p>
	
<p>3. Test for protection against access to hazardous parts</p>	<p>4. Test for protection against access to hazardous parts</p>
	
<p>5. Test for protection against solid foreign objects (Dust test)</p>	<p>6. Test for protection against solid foreign objects (Dust test)</p>

Test Photos--Continued:

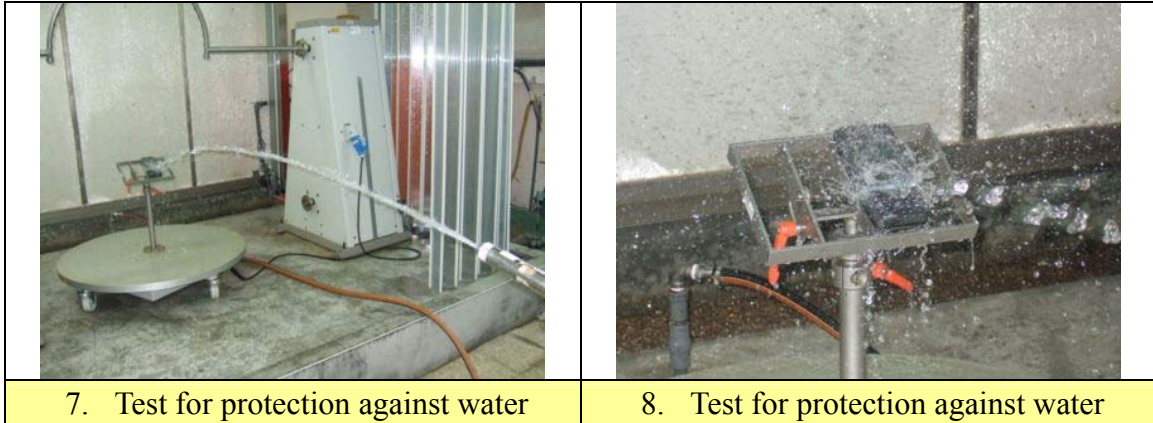

— — — **The End of Test Report** — — —